


Product Specifications

FlashLink[®] Vaccine Electronic Shipping Indicator

Monitoring Period	85 Days
Measurement Range	-40°F to 122°F (-40°C to 50°C)
Temperature Accuracy	±1.0°F/0.5°C
Alarm Settings	Factory pre-configured per model
LED Indicators	Flashing Green: Active, no alarm Flashing Red: Alarm triggered
Battery	Coin Cell Lithium Battery
Dimensions	2.68in L x 1.27in W x 0.45in H (68.07mm L x 32.25mm W x 11.43mm H)
Casing	ABS plastic
Weight	0.64 oz. (18.14g)
Shock Resistance	Withstands 3-foot (1 meter) drop to hard surface
Certification	CE Mark, Calibration Traceable to N.I.S.T., RoHS Compliant
IP Rating	IP56
Storage Conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation

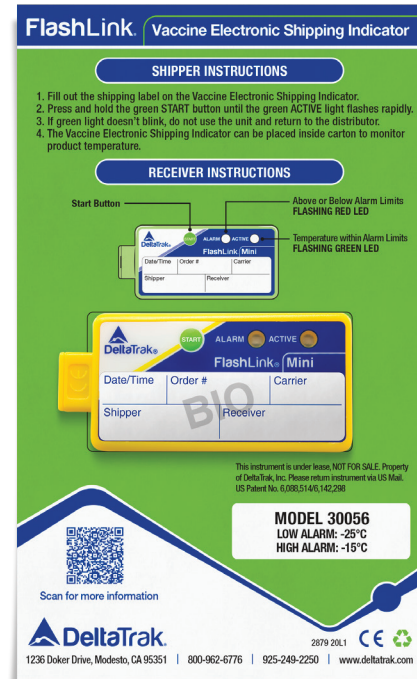

Models	30055	30056
Low / High Alarm	2°C / 8°C	-25°C / -15°C

- Compact single-use electronic indicator
- Monitor vaccines during storage and transport
- Refrigerated vaccine alarms: low 2°C / high 8°C
- Frozen vaccine alarms: low -25°C / high -15°C
- Immediate visual pass/fail indicator
- Mounted on high-visibility locator card
- Post-trip evaluation service available

DeltaTrak manufactures products under an ISO 9001:2015 registered quality management system

SS_30055-X_20L6

