



# Product Specifications

## FlashLink VU In-Transit Logger

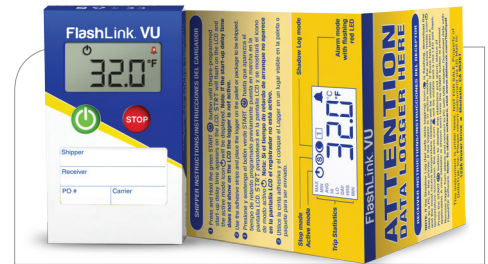

<b>Measurement Range</b>	-40°F to 150°F (-40°C to 65°C)
<b>Temperature Resolution</b>	0.1°F/°C
<b>Accuracy</b>	±1.0°F from 14°F to 77°F (±0.5°C from -10°C to 25°C); ±2.0°F above 77°F (±1.0°C above 25°C) ±2.0°F below 14°F (±1.0°C below -10°C)
<b>Data Capacity</b>	3824 points
<b>Data Download Time</b>	5 seconds typical for 3800 points
<b>Factory Programmable Alarm Levels</b>	High & Low levels over entire range, displayed on LCD
<b>Battery</b>	3V Lithium/18 months
<b>Dimensions</b>	1.962" x 3.423" x .575" (50mm x 87mm x 15mm)
<b>Casing</b>	ABS plastic
<b>Weight</b>	1.6 oz. (45.36 grams)
<b>Shock Resistance</b>	Withstands 3-foot (1 meter) drop to hard surface
<b>Certification</b>	CE Mark, NIST traceable, ROHS Compliant
<b>Display</b>	LCD, Red LED Alarm
<b>IP Rating</b>	IP56
<b>Storage conditions</b>	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
<b>System Requirements</b>	Windows PC with current operating system, Adobe Reader, FlashPDF software
<b>Download Requirements</b>	8-Pin to USB adapter

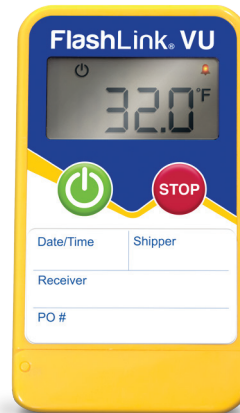

FlashLink VU with high visibility in-transit sleeve

Models	5-Day	15-Day	45-Day	75-Day
<b>Logging Interval</b>	1 min. 54 Sec	5 min. 40 Sec	16 min. 58 Sec	28 min. 16 Sec
<b>°F Models</b>	20741	20742	20743	20744
<b>°C Models</b>	20745	20746	20747	20748

- Large, easy to read LCD display
- Trip history statistics available on LCD
- Patented Shadow Log feature guarantees data even if the operator fails to start the unit, single-use
- Print data using Graphics Printer, FlashPDF software or download to PC
- NIST traceable and CE Mark
- IP56 water-resistant rating

Patent No. 6,088, 514

DeltaTrak manufactures products under an ISO 9000 registered quality management system

SS0075\_16C2

