

GO PDF Lite Logger


Temperature Monitoring Logger

Temperature Monitoring Labels

GO PDF Lite loggers digitally monitor time and temperature of perishable products during distribution and storage. Loggers are flat and feature an integrated USB connection point which can be plugged directly into the USB port of a computer. Once connected, the logger automatically generates a PDF file containing complete time and temperature history, including graphs and summary data. GO PDF Lite loggers eliminate the need for reading devices and proprietary software and are optimal for applications requiring fully independent operation.

GO PDF Lite General Use

GO PDF Lite Loggers provide basic temperature monitoring data. Loggers feature an accuracy range $\pm 0.5^{\circ}\text{C}$ typical between -25°C to 60°C (-22°F to 140°F) over the operating range of -25°C to 60°C (-13°F to 140°F). GO PDF Lite loggers can record data for either 15 or 60 days and function as a data logger only with no alerting capabilities.

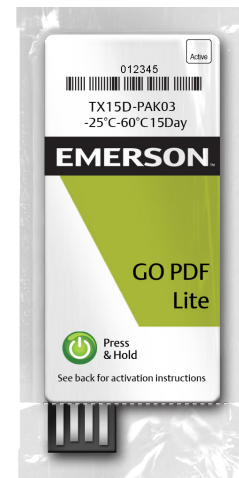

Small, flat, waterproof recorder



Digitally records time and temperature data



Unique design plugs directly into USB port; generates PDF data file



Full independent operation - eliminates readers and software



Great for monitoring exports/imports and worldwide shipments



Various models available for all of your applications




Technical Specifications

Features

Alarm Indicators:	No
Certifications:	FCC, FAA, CE, RCM, China RoHS, WEEE Lithium battery exemption on file
Embedded CSV file:	Available
Export to Other Applications:	Generates PDF
In-Use Life:	15 to 60 days
Life Sciences Validation:	No
Marking Capabilities:	No
NIST Traceable:	Batch level NIST calibration documentation provided upon request
Operating Environment:	-25°C (-13°F) to 60°C (140°F)
Operating System:	Professional Versions of Vista, Windows 7, Windows 8, Windows 10, Adobe Reader SW (Version 9 or later)
Shelf Life:	15 months
Size:	1.25"x 3.15" (31.75mm x 80.01mm length unpouched)
Stop Button:	No
Temperature Accuracy:	+/- 0.5°C typical between -25°C to 60°C (-22°F to 140°F)
Time Zone:	Reconciled to UTC
Waterproof Rating:	IP 67, NEMA 6 rating
Weight:	15.00 g (0.53 oz)

GO PDF Lite Logger

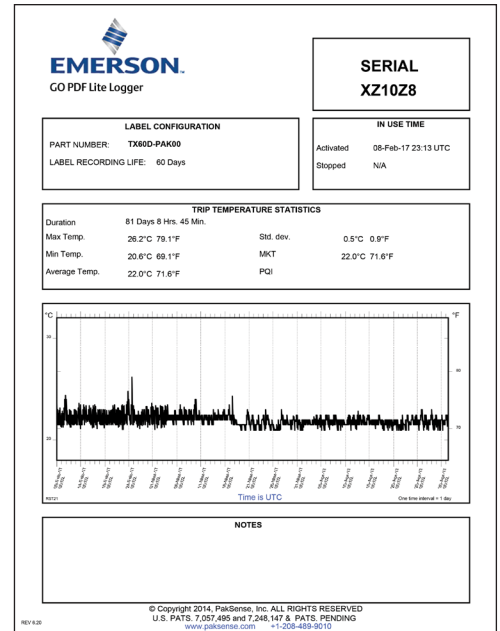

PDF Example

Contact Information

0755-84200058
sales@eofirm.com